



MDT-06  
 (shown with  
 ends installed)

## MDT SERIES

### Multi-deck Open Front Merchandisers

#### MODELS

- ☐ MDT-06  
☐ MDT-08

## FEATURES

### STANDARD NIGHT CURTAINS AID IN ENERGY EFFICIENCY



#### CONSTRUCTION

- Can be used as either stand-alone units or combined in a modular endless design
- Ends must be ordered separately
- Mirrored interiors on end panels
- 24 gauge white painted galvanized steel interior and exterior
- Horizontal electronic lighting
- Drum thermometer
- Fans mounted on hinge panels for easy access
- 2" foamed-in-place "zero ODP" urethane insulation
- 22" deep solid shelving with standard price tag molding
- Number of shelves:
 

MDT-06 .....	12
MDT-08 .....	16
- Cabinet cubic feet:
 

MDT-06 .....	48.9
MDT-08 .....	65.3

#### REFRIGERATION

- Available with remote refrigeration system only
- Refrigerant: R-22
- Refrigeration lines and drain line connections designed to be easily accessed for installation purposes
- Temperature range: 34° to 41°F (1° to 5°C)
- R-factor (insulation efficiency rating): 17.24

#### WARRANTY

- One year limited parts

#### OPTIONS

- ☐ Custom colors  
☐ Lower light assembly  
☐ Stainless steel kickplate  
☐ Extra shelves  
☐ Left and right hand end kits



## MDT SERIES


### MULTI-DECK OPEN FRONT MERCHANDISERS

#### TECHNICAL SPECIFICATIONS


OVERALL LENGTH*	OVERALL HEIGHT	OVERALL DEPTH	MODELS REQUIRED		CASE AMP DRAW			BTUH SINGLE @15°F	BTUH RACK @15°F	NORMAL AMBIENT CONDENSING UNIT	HIGH AMBIENT CONDENSING UNIT
					120V	230V					
			MDT-06	MDT-08	LIGHTS	DEF. HTRS.	FANS	SUCTION	SUCTION	UP TO 100°F†	100° – 120°F†
6'0"	80 <sup>1</sup> / <sub>8</sub> "	37 <sup>1</sup> / <sub>2</sub> "	1		0.5	4.4	0.6	8500	8250	MHHX0191	MHHX0251
8'0"	80 <sup>1</sup> / <sub>8</sub> "	37 <sup>1</sup> / <sub>2</sub> "		1	0.5	6.1	0.9	10,640	10,320	MHHX0191	MHHX0251
12'0"	80 <sup>1</sup> / <sub>8</sub> "	37 <sup>1</sup> / <sub>2</sub> "	2		1.0	8.8	1.2	15,960	15,480	MHHX0351	MHHX0441
14'0"	80 <sup>1</sup> / <sub>8</sub> "	37 <sup>1</sup> / <sub>2</sub> "	1	1	1.0	10.5	1.5	18,620	18,060	MHHX0441	MHHX0441
16'0"	80 <sup>1</sup> / <sub>8</sub> "	37 <sup>1</sup> / <sub>2</sub> "		2	1.0	12.2	1.8	21,000	20,370	MHHX0441	MHHX0501
18'0"	80 <sup>1</sup> / <sub>8</sub> "	37 <sup>1</sup> / <sub>2</sub> "	3		1.5	13.2	1.8	23,940	23,220	MHHX0501	MHHX0501
20'0"	80 <sup>1</sup> / <sub>8</sub> "	37 <sup>1</sup> / <sub>2</sub> "	2	1	1.5	14.9	2.1	26,600	25,800	MHHX0501	MHHX0501
22'0"	80 <sup>1</sup> / <sub>8</sub> "	37 <sup>1</sup> / <sub>2</sub> "	1	2	1.5	16.6	2.4	29,260	28,380	MHHX0501	MHHX0501
24'0"	80 <sup>1</sup> / <sub>8</sub> "	37 <sup>1</sup> / <sub>2</sub> "		3	1.5	18.3	2.7	31,920	30,960	MHHX0501	MHHX0501
26'0"	80 <sup>1</sup> / <sub>8</sub> "	37 <sup>1</sup> / <sub>2</sub> "	3	1	2.0	19.3	2.7	34,580	33,540	CONSULT FACTORY	
28'0"	80 <sup>1</sup> / <sub>8</sub> "	37 <sup>1</sup> / <sub>2</sub> "	2	2	2.0	21.0	3.0	37,240	36,120		
30'0"	80 <sup>1</sup> / <sub>8</sub> "	37 <sup>1</sup> / <sub>2</sub> "	1	3	2.0	22.7	3.3	39,900	38,700		

\*Total overall length without ends. Add 2" for each end. †Add suffix "B" for single phase unit or "C" for three phase.


**NOTE: BTUH LOAD AND UNIT SIZES ARE BASED ON A 75°F, 55% RELATIVE HUMIDITY (MAXIMUM) STORE.**

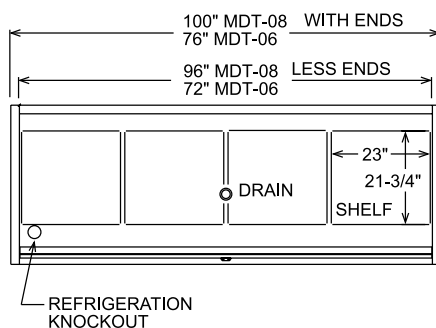

PLAN VIEW

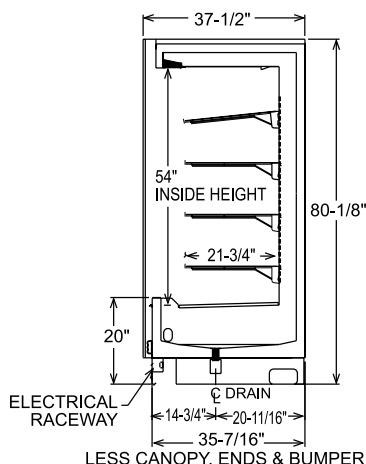

SIDE VIEW

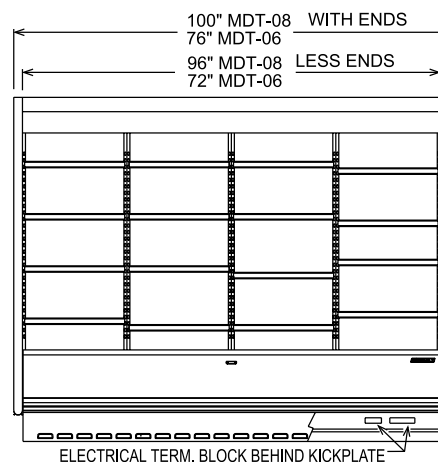

ELEVATION VIEW

#### LISTINGS



#### HOOKUP

Hardwire, remote refrigeration.

#### BID SPECIFICATIONS

Item no. MDT-\_\_\_\_\_  
Provide \_\_\_\_\_ ( ) Multi-deck Open Front Merchandiser(s), Master-Bilt model no. MDT-\_\_\_\_\_.

Merchandiser to be constructed of 24 gauge white painted galvanized steel interior and exterior with 2" foamed-in-place "zero ODP" urethane insulation. Merchandiser may

be used as either a stand-alone unit or combined in a modular endless design. Merchandiser supplied with mirrored interiors on end panels, horizontal electronic lighting, drum thermometer and 22" deep solid shelving with standard price tag molding. Evaporator fans will be mounted on hinge panels for easy access.

Merchandiser available with remote refrigeration

system only. System uses R-22 refrigerant. Refrigeration lines and drain line connections designed to be easily accessed for installation purposes. The temperature range will be 34° to 41°F (1° to 5°C).

Merchandiser to be UL and C-UL listed and UL EPH classified. Merchandiser to have one year limited parts warranty.

**NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.**



908 Highway 15 North • New Albany, MS 38652

PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • [www.master-bilt.com](http://www.master-bilt.com)